



FEATURES

Bain maries with opening for "2000" series pans are designed for preparation and storage of food products

EXTERIOR

Stainless steel front and roll cover. Back, sides and bottom heavy gauge galvanized metal. Plastic cutting board 8" wide.

INTERIOR

All stainless steel. Dividers for full sizes 2000 pan included

ADJUSTABLE SHELVING

One row of heavy duty wire display shelves. Adjustable in vertical increments of 1/2" (1.27cm)

DOORS

Doors are of all stainless steel construction, self closing, fully insulated with full perimeter self adjusting magnetic gaskets.

LIGHTING

Incandescent lamp with protective cap. Toggle switch included.

DRAIN

Only for self-contained cases: An electric evaporator pan is installed. No plumbing or drain connection is necessary.

Only for remote cases: Drain connection is in the back of the case according to mechanical plan.

ELECTRICAL

Bain Marie operates on 115 V 60 Hz single phase.



REFRIGERATION

Only for self-contained cases: Refrigerant 134A. Heavy-duty air cooled commercial type condensing unit with forced air refrigeration system provides uniform temperature and humidity throughout the case. The temperature inside the case is controlled by a low-pressure control set between 34°F-42°F.

Only for remote cases: Forced air refrigeration system provides uniform temperature and humidity throughout the case. Expansion valve is provided.

OPTIONAL

Stainless steel exterior; butcher block cutting board; pan slides; cylinder locks in doors; two drawers in place of door; swivel casters, with 2 brakes.

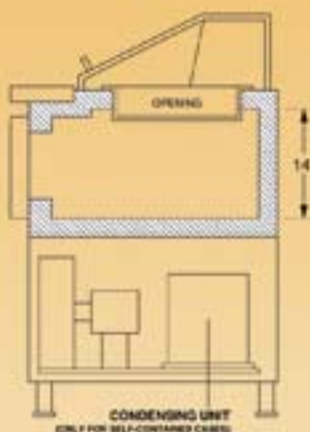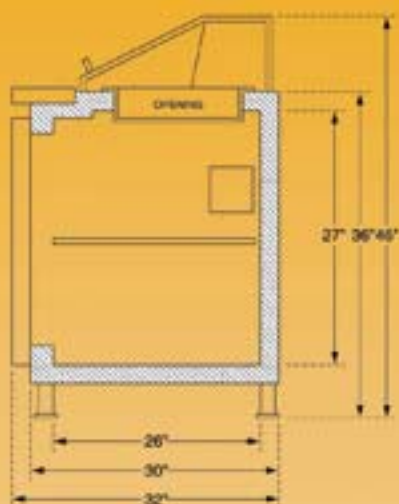

MECHANICAL PLAN

REFRIGERATION LINE



□ 1" L.W.

□ ELECTRIC LINE

S & V Restaurant Equipment Mfg. Corp.
4320 Park Avenue • Bronx, NY 10457 • Tel: (718) 220-1140 • Fax: (718) 364-1764



Model		Length (in.)	Vol. (cu. ft.)		Doors		HP		Amps (A)		Weight (lbs.)	
Self-contained	Remote		Self-cont.	Remote	Self-cont.	Remote	Self-cont.	Remote*	Self-cont.	Rem.	Self-cont.	Rem.
BM4SC	BM4R	48	14	18	1 1/2	2	1/4	1/4	8.9	0.9	325	300
BM5SC	BM5R	60	17	21	1 1/2	2	1/4	1/4	10.5	1.45	360	330
BM6SC	BM6R	72	25	29	2 1/2	3	1/3	1/3	11.5	1.45	400	375
BM8SC	BM8R	96	35	39	3 1/2	4	1/2	1/2	14.2	1.8	480	450
BM10SC	BM10R	120	45	49	4 1/2	5	1/2	1/2	15.6	3.25	550	520
BM12SC	BM12R	144	55	59	5 1/2	6	3/4	3/4	18.3	3.25	625	600

*Recommended

Continual product improvement may necessitate specification changes without notice.