



## FEATURES

Self-service upright merchandisers are designed for small floor space requirements. The merchandiser offers a wide open view and convenient setting for your dairy or produce.

### EXTERIOR

White powder coated aluminum finish front and sides with mirror finish stainless steel trim.

### INTERIOR

White powder coated aluminum finish inside back and ends. Stainless steel bottom pan. The produce case has a mirror on back wall.

### ADJUSTABLE SHELVING

Adjustable heavy duty full length stainless steel shelves. Four shelves for remote; three shelves - self-contained; two shelves-produce.

### LIGHTING

Brilliant shadow free illumination by top mounted lamp and the lamps mounted under each shelf. All full length fluorescent lamps are protected by safety shields against breakage.

### DRAIN

Only for self-contained cases. An electric evaporator pan is installed. No plumbing or drain connection is necessary.

Only for remote cases: Drain connection is in the bottom in the housing.

### ELECTRICAL

Only for self-contained cases: Upright merchandiser operates on two voltages: one is 115V 60 Hz single phase, second is 230 V 60 Hz single phase.

Only for remote cases: Remote upright merchandiser is operates on 115V 60 Hz single phase.


### REFRIGERATION

Only for self-contained cases: All models are completely self-contained. Refrigerant R404. Heavy-duty air cooled commercial type condensing unit with forced air refrigeration system provides uniform temperature and humidity throughout the case. The temperature inside the case is controlled by a low-pressure control set between 34°F-42 °F.

Only for remote cases: Forced air refrigeration system provides uniform temperature and humidity throughout the case. Expansion valve is provided.

### OPTIONAL

Stainless steel exterior; stainless steel interior; baskets for produce case;

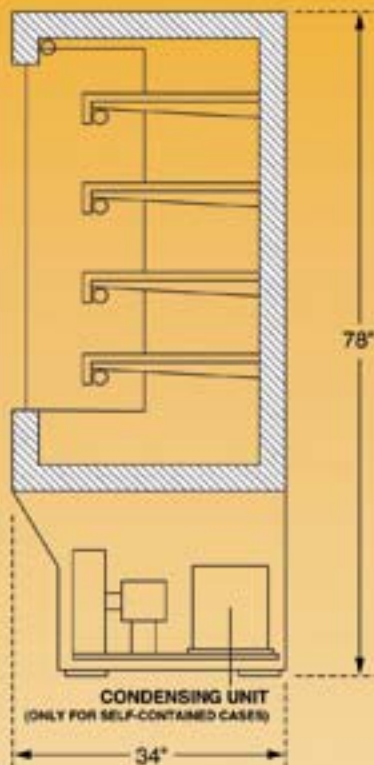

**S & V Restaurant Equipment Mfg. Corp.**

4320 Park Avenue • Bronx, NY 10457 • Tel: (718) 220 - 1140 • Fax: (718) 364 - 1764



Model		Length (in.)	HP		Amps (A)		Weight (lbs)	
Self-contained	Remote		Self-cont	Rem.**	Self-cont	Rem.	Self-cont	Rem.
GC48SC	GC48R	48	3/4	3/4	20	5.1	750	500
GC72SC	GC72R	72	1	1	$\frac{7}{8}$ *	5.9	950	600
GC96SC	GC96R	96	1 1/2	1 1/2	$\frac{7}{8}$ *	10.2	1050	700
	GC144R	144	—	2	—	15.3	—	900

\*230V  
115V

\*\*Recommended

Continual product improvement may necessitate specification changes without notice.